


CURRENT 3.0 Ampere
 VOLTAGE RANG 20 to 200 Volts

SK32C THRU SK320C

FEATURES

- ◆ The plastic package carries Underwriters Laboratory Flammability Classification 94V-0
- ◆ For surface mounted applications
- ◆ Low reverse leakage
- ◆ Built-in strain relief, ideal for automated placement
- ◆ High forward surge current capability
- ◆ High temperature soldering guaranteed: 250°C/10 seconds at terminals

DO-214AB/SMC

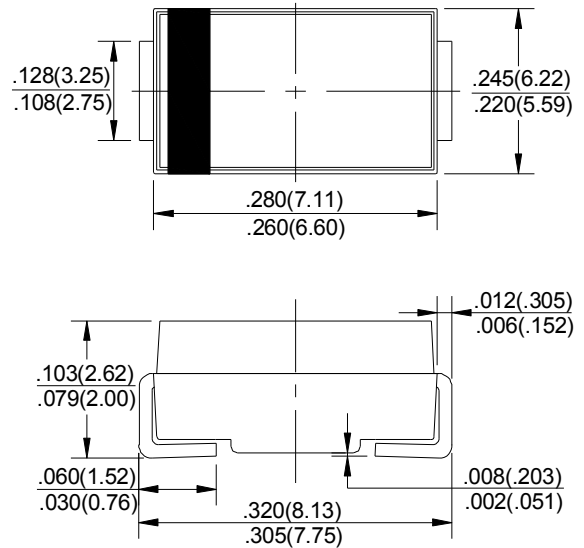

Dimensions in inches and (millimeters)

MECHANICAL DATA

Case: JEDED DO-214AB transfer molded plastic

- Terminals: Solder plated, solderable per MIL-STD-750
- Method 2026
- Polarity: Color band denotes cathode end
- Weight: 0.007 ounce, 0.25 gram

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.
 Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.

	SYMBOLS	SK32	SK33	SK34	SK35	SK36	SK38	SK310	SK315	SK320	UNITS	
Maximum repetitive peak reverse voltage	V_{RRM}	20	30	40	50	60	80	100	150	200	VOLTS	
Maximum RMS voltage	V_{RMS}	14	21	28	35	42	56	70	105	150	VOLTS	
Maximum DC blocking voltage	V_{DC}	20	30	40	50	60	80	100	150	200	VOLTS	
Maximum average forward rectified current at T_L (see fig.1)	$I_{(AV)}$	3.0									Amps	
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I_{FSM}	100.0									Amps	
Maximum instantaneous forward voltage at 3.0A	V_F	0.55			0.70		0.85		0.95		Volts	
Maximum DC reverse current $T_A=25^\circ C$ at rated DC blocking voltage $T_A=100^\circ C$	I_R	0.5					0.2				mA	
		20			10		2.0					
Typical junction capacitance (NOTE 1)	C_J	500			300					pF		
Typical thermal resistance (NOTE 2)	$R_{\theta JA}$	55.0									°C/W	
Operating junction temperature range	T_J	-50 to +125					-50 to +150					°C
Storage temperature range	T_{STG}	-50 to +150									°C	

Note: 1. Measured at 1MHz and applied reverse voltage of 4.0V D.C.
 2. P.C.B. mounted with 0.2x0.2" (5.0x5.0mm) copper pad areas

CURRENT 3.0 Ampere
 VOLTAGE RANG 20 to 200 Volts

SK32C THRU SK320C

RATING AND CHARACTERISTIC CURVES SK32 Thru SK320

