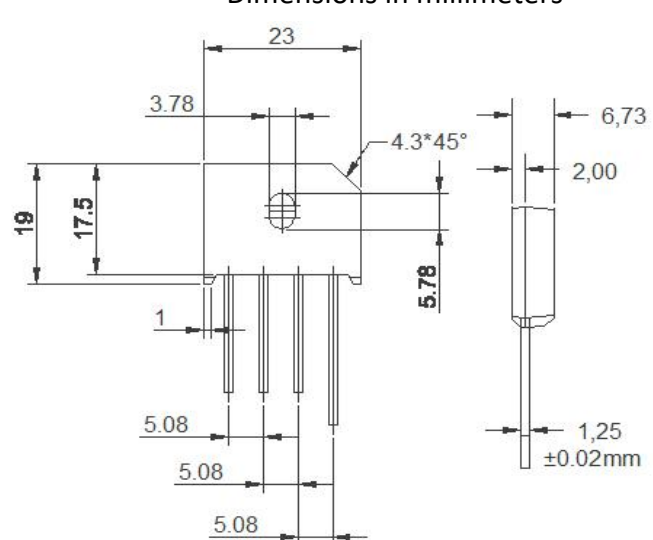


CURRENT 6 Ampere
 VOLTAGE RANG 50 to 1000 Volts

KBU6005 THRU KBU610

特征/Features	外形尺寸/Outline Dimensions
<ul style="list-style-type: none"> ◆ GPP芯片 Glass passivated chip ◆ 低反向漏电流 Low Reverse Leakage Current ◆ 高耐浪涌电流能力 High surge current capability ◆ 接线端与壳体间绝缘耐压2500V Case to Terminal Isolation Voltage 2500V 	<p>Case: KBU Series Dimensions in millimeters</p> 
机械参数/Mechanical Data	
<ul style="list-style-type: none"> ◆ 本体: 塑封 Case: plastic package ◆ 标识/极性: 本体标记 Marking / Polarity: Marked on Body ◆ 重量: 约克 Weight: About 6.66 grams 	

极限值/Maximum Ratings and Thermal Characteristics @ Ta = 25°C unless otherwise noted

符号 Symbol	特性 Characteristic	KBU6							单位 Unit
		005	01	02	04	06	08	10	
V _{RRM}	最大反向重复峰值电压 Maximum Recurrent Peak Reverse Voltage	50	100	200	400	600	800	1000	V
I _{F (AV)}	平均整流输出电流 Average Forward Output Rectified Current@Ta =85°C	6							A
V _F	正向峰值电压 Forward Voltage Per Leg @I _{FM} =6.0A	1.1							V
I _{FSM}	正向浪涌电流 Peak Forward Surge Current 8.3ms Single Half Sine-wave superimposed on rated load	160							A
I _R	反向漏电流 Maximum DC reverse current at rated Ta = 25°C DC blocking voltage per leg Ta = 125°C	5 500							uA
i ² t	热容值 Rating for fusing (t<8.3ms)	106							A ² S
V _{isol}	绝缘耐压 Rms isolation voltage from case to leads	2500							V
R _{θJC}	热阻 Maximum thermal resistance per leg	4.2							°C/W
T _J , T _{STG}	结温, 存储条件 Operating Junction and storage temperature range	-55~150							°C

Note:
 (1) Junction to case with heatsink
 (2) Recommended mounting position is to bolt down on heatsink with silicone thermal compound for maximum heat transfer with M3 screw .

CURRENT 6 Ampere
VOLTAGE RANG 50 to 1000 Volts

KBU6005 THRU KBU610

■ **特性曲线（典型） Characteristics(Typical)**

Fig 1-forwardCurrent derating Curve
 图1正向电流降额曲线

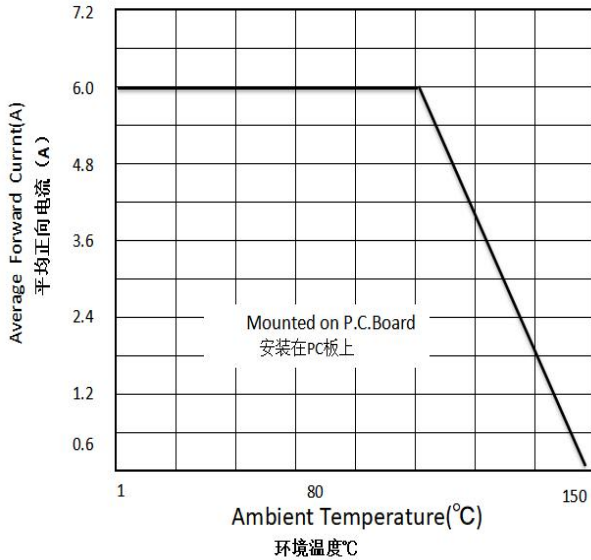


Fig.2-Maximum Non-Repetitive Surge Current
 图2 最大不重复正向浪涌曲线

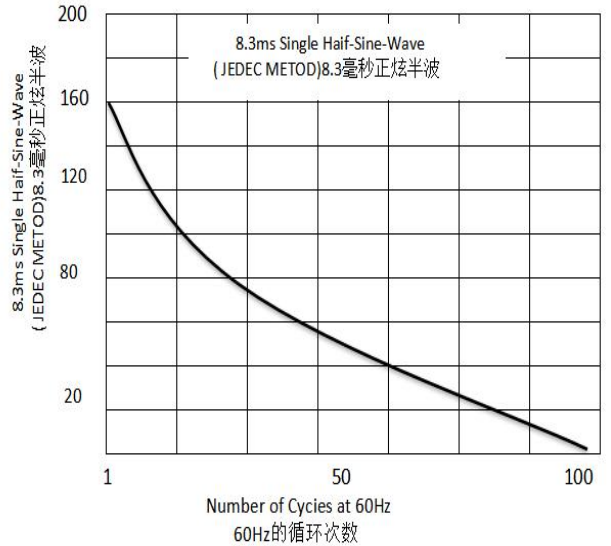


FIG3.Typical Reverse Characteristics

图 3. 典型反向特性

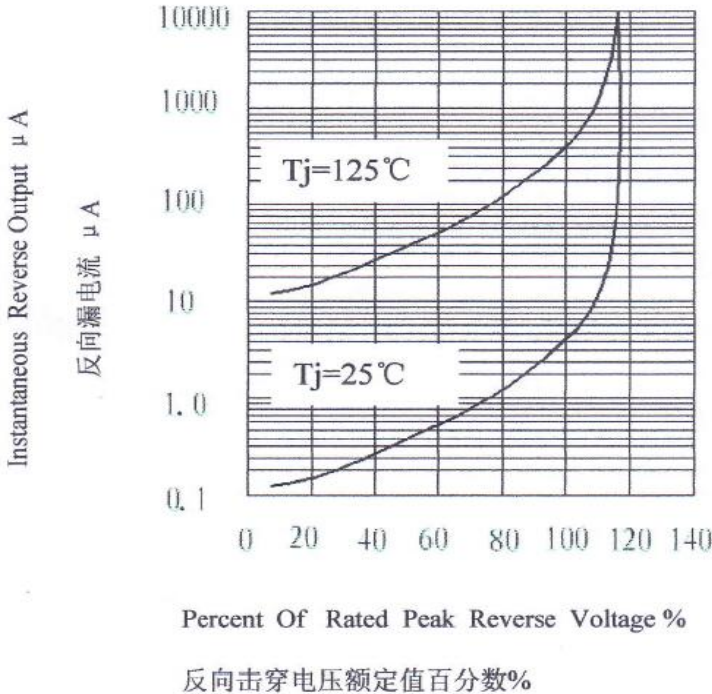


FIG4.Instantaneous Forward Voltage

图 4. 典型正向特性

