

CURRENT 60 Ampere
VOLTAGE RANG 600 Volts**APT60DQ60BG**

DATA SHEET

TYPE: 60A/600VPackage: T0-3P

Prepared by	Audit by	Approved by

CURRENT 60 Ampere
VOLTAGE RANG 600 Volts

APT60DQ60BG**VRRM = 600V****IFAV = 60A(30A*2)****VF = 2.0V****TRR = 35ns****Product Application:**



- Switch mode Power Supply
- Inverters
- Free Wheeling Diode
- Motor Controllers
- Converters
- Inverters
- Snubber Diode
- PFC

Product Features:

- Ultrafast Recovery Times
- Soft Recovery Characteristics
- Popular TO-3P Package
- Low Forward Voltage
- Low Leakage Current
- Avalanche Energy Rated

Product Benefits:

- Low Losses
- Low Noise Switching
- Cooler Operation
- Higher Reliability Systems
- Increased System Power Density

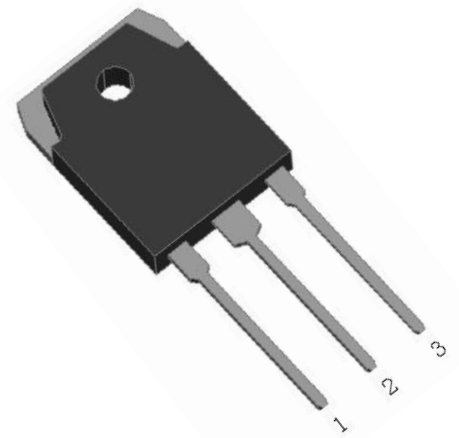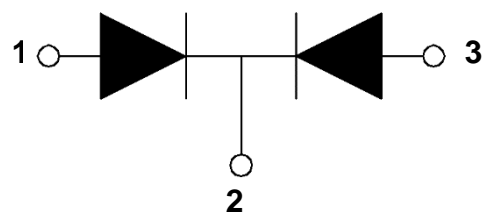Package:**S2FD60B60 B****Circuit diagram****1 - Anode****3 - Anode****2 - Cathode**

CURRENT 60 Ampere
 VOLTAGE RANG 600 Volts

APT60DQ60BG

MAXIMUM RATINGS

All Ratings: Tc = 25° C unless otherwise specified.

Symbol	Characteristic / Test Conditions	TYP	UNIT
VR	Maximum D.C. Reverse Voltage	600	Volts
VRRM	Maximum Peak Repetitive Reverse Voltage		
IF(AV)	Maximum Average Forward Current (Tc = 100°C, Duty Cycle = 0.5)	60(30*2)	Amps
IFSM	Non-Repetitive Forward Surge Current (Tj = 25°C, 8.3ms)	400	
TJ , TSTG	Operating and Storage Temperature Range	-55 to 150	° C
TL	Lead Temperature for 10 Sec	260	

STATIC ELECTRICAL CHARACTERISTICS

Symbol	Characteristic / Test Conditions		TYP	MAX	UNIT
VF	Forward Voltage	IF = 30A, Tj = 25°C	2.0	2.4	Volts
		IF = 30A, Tj = 150°C	1.4	1.8	
IRM	Maximum Reverse Leakage Current	VR = 600V, Tj =25°C		10	μ A
		VR = 600V, Tj =150°C		500	
Trr	Reverse Recovery Time	IF=0.5A IRM=1A IRR=0.25A TC=25°C	35	45	ns
CJ	Junction Capacitance, VR =200V		25		pF

THERMAL AND MECHANICAL CHARACTERISTICS

Symbol	Characteristic / Test Conditions	S2FD60B60 B	UNIT
Rθ JC	Junction-to-Case Thermal Resistance	1.0	°C/W
Wt	Package Weight	5.4	g
Torque	Maximum Mounting Torque	0.5	N.m

APT60DQ60BG

CURRENT 60 Ampere
VOLTAGE RANG 600 Volts

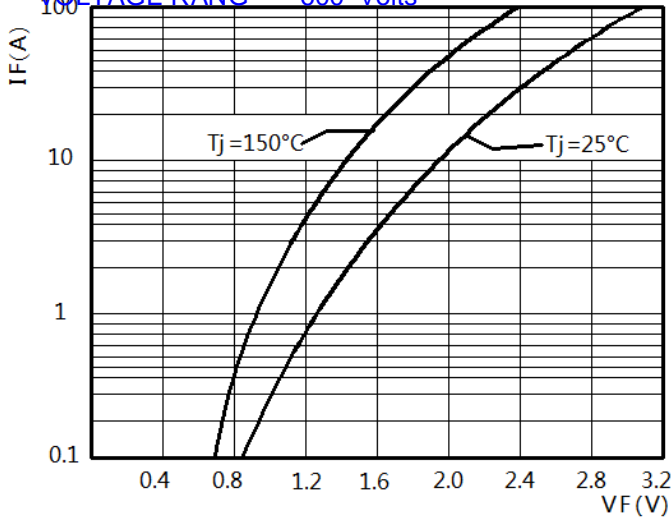


FIGURE 1. FORWARD CURRENT vs FORWARD VOLTAGE

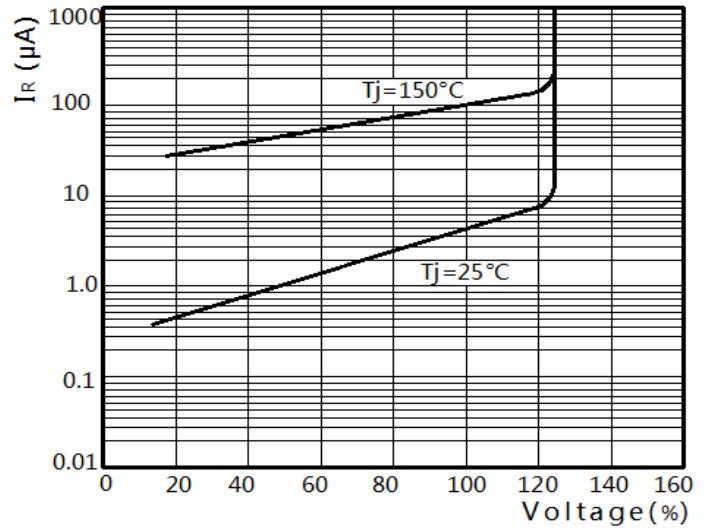


FIGURE 2. REVERSE CURRENT vs REVERSE VOLTAGE

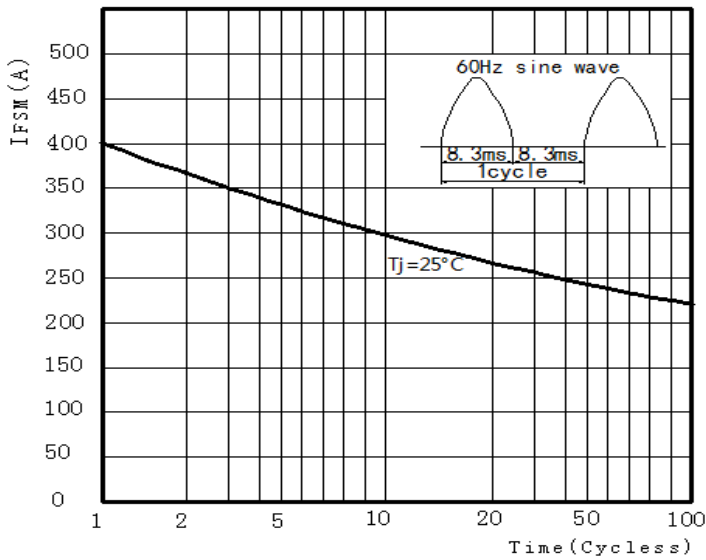


FIGURE 3. Peak Surge Forward Capability

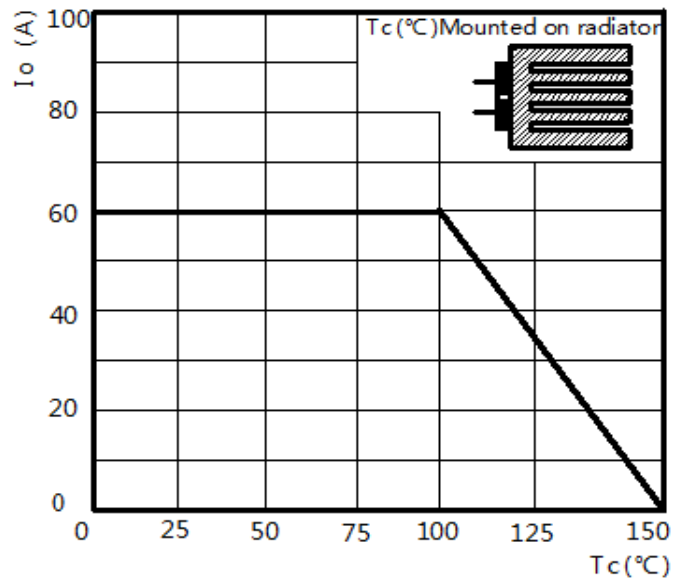


FIGURE 4. CURRENT DERATING CURVE



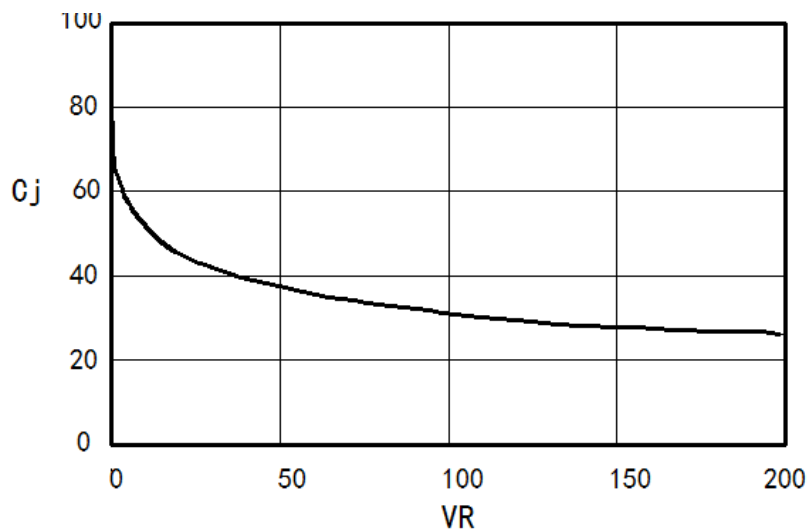


FIGURE 5. JUNCTION CAPACITANCE vs REVERSE VOLTAGE

Dimensioned drawing

CURRENT 60 Ampere
VOLTAGE RANG 600 Volts

APT60DQ60BG

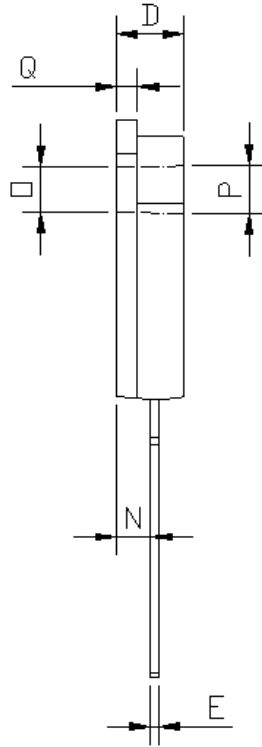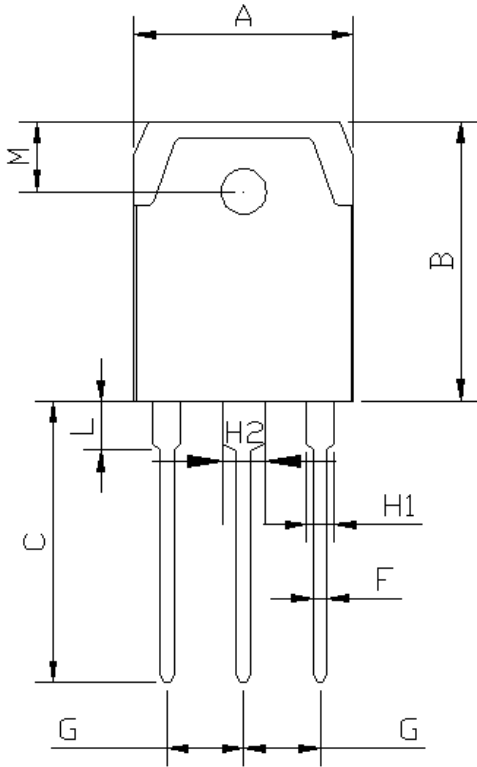

Dim.	Millimeter		Inches	
	min	max	min	max
A	15.1	16.1	0.594	0.634
B	19.4	20.4	0.764	0.803
C	19	20	0.748	0.787
D	4.3	5.3	0.169	0.209
E	0.4	0.8	0.016	0.031
F	0.8	1.2	0.031	0.047
G	5.25	5.65	0.207	0.222
H1	1.8	2.2	0.071	0.087
H2	2.8	3.2	0.110	0.126
L	2.7	3.1	0.106	0.122
M	4.7	5.3	0.185	0.209
N	2.2	2.6	0.087	0.102
O	3	3.3	0.118	0.130
P	3.3	3.6	0.130	0.142

Marking

